

Precast Concrete Containment Bin Walls



PRECASTSYSTEMS,LLC


5877 Bullitt Rd. Greencastle, PA 17225
Phone: 717.369.3773 sales@precastsys.com
www.precastsystemsllc.com



Precast Concrete Containment Bin Walls


PRECASTSYSTEMS, LLC

Corner Section

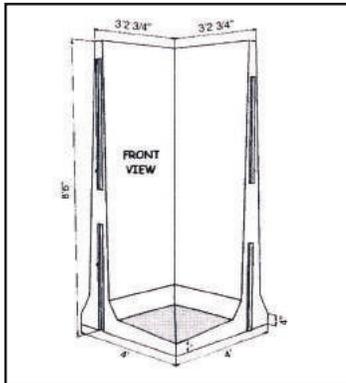


Approx Weight
3,900lbs

Center Wall

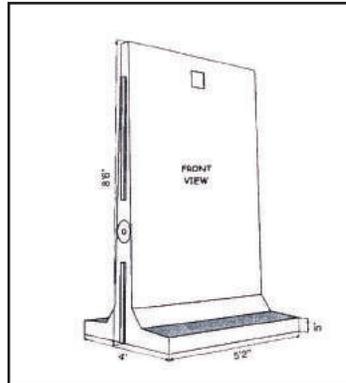


Approx Weight
5,300lbs

Standard Section

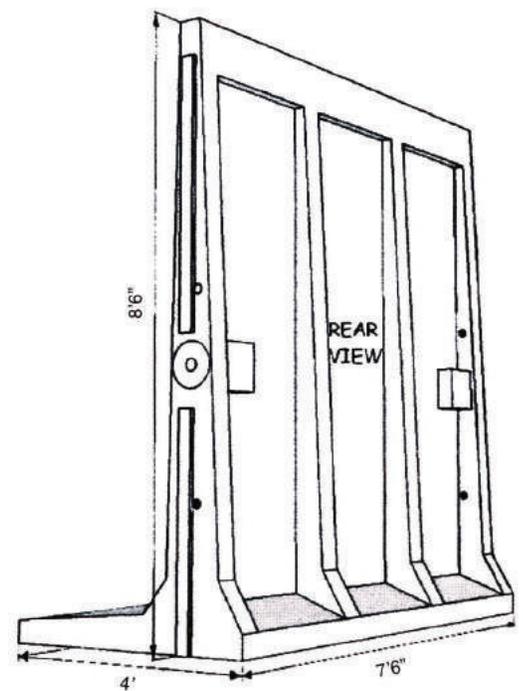


Approx Weight
5'2" - 3,750lbs
7'6" - 5,500lbs

Base Preparation

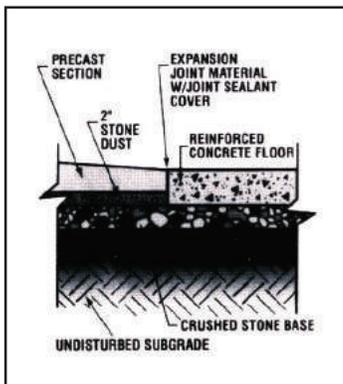

Wall to Panel

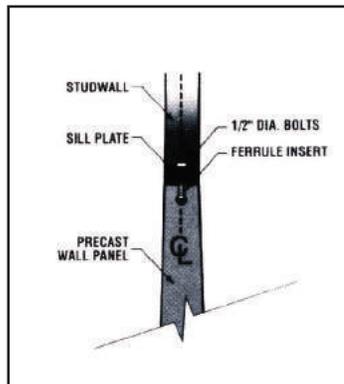

Materials

- 4 ea.- #741 Std. 5'2" Center sections with inserts
- 2 ea.- #742 Std. 4x4 Center sections with inserts
- 16ea.-#743 Std. 5'2" Side/Back wall sections with inserts
- 1ea.- #755 Std. Filler section with hardware
- 17sets- Nuts, bolts and washers
- 3ea- Flatbed loads freight to job site

Note: Product can be purchased

- FOB our Chambersburg, PA production facility
- Supplied and delivered to your site
- Supplied, delivered & set by our experienced erection crew

"Typical" Wall Foot Print

